



# harmony FREESTYLE

## Discover the stylish, versatile and aesthetic freestyle

Soundtect's Harmony Freestyle™ Panels range are architecturally inspired and can be used to create stunning, utterly modern wall and ceiling applications offering bespoke arrangements incorporating the Freestyle standard and Timba wood effect range of colours.

Standard configuration 25mm width x 20mm depth battens are prefixed with 10mm spacing to a backing felt which is super fine allowing easy installation on curved and straight surfaces alike.

Other configurations available on request.

With up to 70% recycled content and finely tuned reverberation and sound control, Freestyle™ is the natural choice for bespoke designs that challenge the status quo.

Developed by London-based Soundtect®, Freestyle™ panels are built to exacting quality and use all of Soundtect's pioneering acoustic know-how.

### KEY FEATURES & BENEFITS

- Elevated design potential
- Incredible versatility
- Available in any configuration from the 24 Freestyle colour range and other wood finishes on request
- Maximum size panel 1200 x 2400. Custom sizes available on request
- Installed on the walls or ceiling to create a harmonious finish with superb sound control properties
- Excellent sound absorption
- Finely tuned reverberation thanks to Soundtect's pioneering acoustic technology
- Environmentally friendly and recyclable, Freestyle™ Acoustic Panels are ideal for projects when there is an eco-conscious consideration to be made
- Manufactured by Soundtect®
- Independently certified

# harmony

## Colour range



## Product Specifications

### TYPICAL APPLICATIONS

Wall coverings.  
Ceiling rafts.  
Ceiling coverings.

- Composition: 100% Polyester.
- Low VOC.
- Colour Fastness Properties
  - Colorfastness to Light, AATCC16(3), Class 4.5
- ISO 14006 Certified Manufacturing Facility.
- Certified 100% Recyclable.
- Recycled Content: Up to 70% (min. 50%) post consumer recycled content.

### FIRE RATING

- EN13501, Bs1d0

### SIZE

- 2400 x 1200 maximum panel size.
- Supplied as standard with batten size 25mmW x 20mmD with 10mm spacing.
- Custom slat sizes and spacing available on request

### DENSITY THICKNESS


- 10mm, 2kg/sqm
- 20mm, 4kg/sqm

### ACOUSTIC PROPERTIES

Based on 20 x 30 slats with 10mm spacing NRC 0.85.

### INSTALLATION

- Freestyle™ acoustic panels can be installed by two methods.
- Attach with screws to ceiling.
  - Wall mounted; use a contact adhesive.

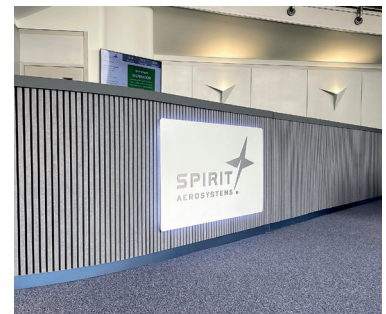

### Moisture Absorption

Polyester fibre when exposed to an atmosphere of 50°C at 90% relative humidity for four days showed moisture absorption of less than 0.03% by weight. Polyester is not affected by moisture.

Does not contain any Red List chemicals\*.