



ripple

Discover the stylish, versatile and aesthetic freestyle

The Soundtect Ripple: Gently curved semi circular tubes of superior acoustic felt, affixed to walls for a stunning rippled wall effect, with superb acoustic qualities.

The easily installed design is suited to a range of commercial applications and ensures effective acoustic management whatever the space. Each strip, up to a maximum 2400mm length, can be cut into various widths of choice.

Soundtect recommends a selection of 30mm, 60mm and 100mm (as shown) for a truly stunning feature.

With up to 70% recycled content and finely tuned reverberation and sound control, Freestyle™ is the natural choice for acoustic designs that challenge the status quo.

Developed by London-based Soundtect, Freestyle™ panels are built to exacting quality and use all Soundtect's pioneering acoustic know-how.

KEY FEATURES & BENEFITS

- Elevated design potential
- Incredible versatility
- Available in 24 colours
- Create bespoke designs in specific corporate or design colours
- Installed on the walls to create a harmonious finish with superb sound control properties
- Finely turned reverberation thanks to Soundtect's pioneering acoustic technology
- Environmentally friendly and recyclable, Freestyle™ Acoustic Panels are ideal for projects when there is an eco-conscious consideration to be made
- Manufactured by Soundtect®
- Independently certified
- Excellent sound absorption

Soundtect®

freestyle

Colour range



Product Specifications

TYPICAL APPLICATIONS

Wall Coverings

- Composition: 100% Polyester
- Low VOC
- Colour Fastness Properties
 - Colorfastness to Light, AATCC16(3), Class 4.5
- ISO 14006 Certified Manufacturing Facility
- Certified 100% Recyclable
- Recycled Content: Up to 70% (min. 50% post consumer recycled content)

FIRE RATING


- EN13501, Bs1d0

•

SIZE


- 30 x 2400mm
- 50 x 2400mm
- 60 x 2400mm
- 100 x 2400mm

More sizes available on request

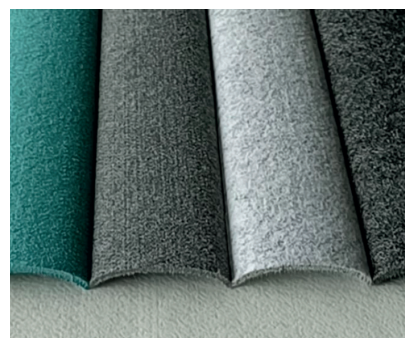

DEPTH OF CURVATURE

- 12mm



ACOUSTIC PROPERTIES

NRC expected 0.85 - test results pending

INSTALLATION



- Wall mounted Freestyle™ coverings.

Moisture Absorption

Polyester fibre when exposed to an atmosphere of 50°C at 90% relative humidity for four days showed moisture absorption of less than 0.03% by weight. Polyester is not affected by moisture.

Does not contain any Red List chemicals*.

Installation Method

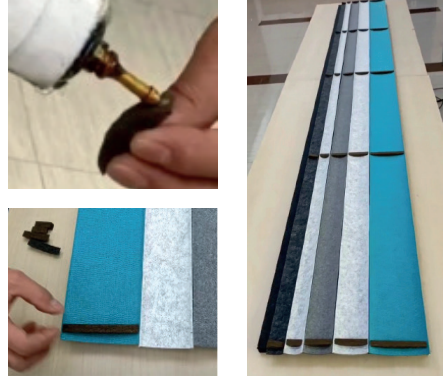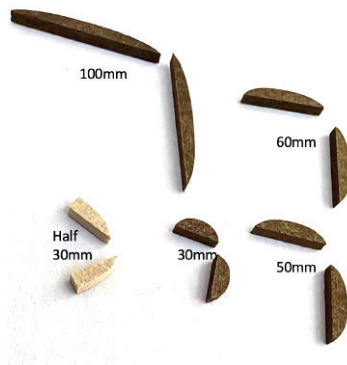

1. Select correct size bracket for each tube

2. Affix curved side of bracket to the back of each tube recommended adhesive: hot melt glue (with gun)

5 brackets per tube has been supplied. Space the brackets evenly across the length of each tube



3. Apply adhesive on the back of all brackets



4. Position tubes on desired position on wall. Press and hold until securely fixed.