



A better way to transform open, sound-challenged spaces into more comfortable environments.

Creating the perfect acoustic environment has never been more stylish. Our Celeste wall and ceiling panel is designed to balance reverberation, absorb sound and create an audio atmosphere where sound comes through crisply and cleanly.

This distinct panel also provides a visually pleasing design element to any room. The flower design catches the eye but camouflages its true intent, making it look more like a work of art than a functional fixture.

Due to its visual distinction and acoustic qualities, this panel is ideal for both commercial and residential settings.

KEY FEATURES & BENEFITS


- Soundtect acoustic panels offer design options that are unusual and stand out, giving designers more choice and flexibility for acoustic applications.
- Reverberation is reduced by offering Class A absorption to increase speech intelligibility in a specific area while reducing background sound noise levels.
- The panels are easily wall mounted and can be used to create floating ceilings that absorb sound and enhance sound quality.
- Soundtect panels are for indoor use only but can be used in any area that acoustic treatments are required including areas of high levels of humidity such as swimming pools





celeste

Standard Colour range

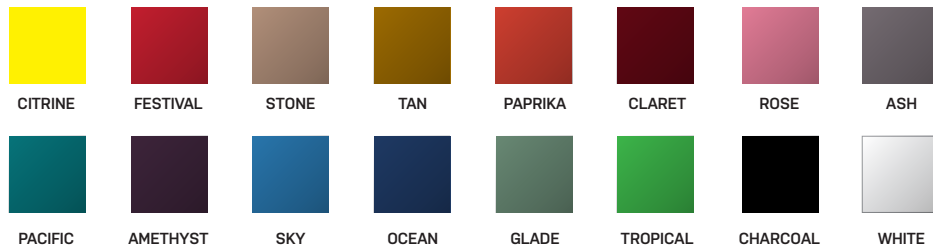

Product Specifications

TYPICAL APPLICATIONS

Wall and ceiling coverings

- Composition: 100% Polyester
- Low VOC
- Colourfastness Properties
 - Colourfastness to Light, AATCC16(3), Class 4.5
- BS EN ISO 354:L2003.
- Certified 100% Recyclable
- Composition: 100% polyester fibre (PET) 70% recycled

FIRE RATING

- BS1 D0
- Suitable for use in Class1 and Class 0

SIZE

- Product size: 800 x 800 x 45mm

ACOUSTIC PROPERTIES

- NRC: 0.55
- EN ISO 11654:1997

INSTALLATION

Easy installation for walls and ceilings

- Walls
 - various options possible. Please ask for details
- Ceiling Anchors
 - Install the ceiling anchor.
 - Insert CLASS ring into pre-formed hole on the rear of the panel.
 - Attached suspension cable and adjust depth.
 - Hang panel.

Moisture Absorption

Polyester fibre when exposed to an atmosphere of 50°C at 90% relative humidity for four days showed moisture absorption of less than 0.03% by weight. Polyester is not affected by moisture.

Does not contain any Red List chemicals*.