



linear

Pattern creating movement as well as function

Serenity and calm is the theme of these dimensionally sculpted panels. Mounted in a matched run on a wall, the motif excites the eye.

Linear embossed freestyle sheets are a confident presence in the space.

Producing sound control technology composed of recycled materials the pattern is designed to define the essence of exceptional decor

KEY FEATURES & BENEFITS

- Soundtect acoustic panels offer design options that are unusual and stand out, giving designers more choice and flexibility for acoustic applications.
- Soundtect panels are for indoor use only but can be used in any area that acoustic treatments are required including areas of high levels of humidity such as swimming pools.
- Reverberation is reduced by offering class C-E absorption depending on application. To increase speech intelligibility in a specific area while reducing background sound noise levels.
- The panels are easily wall mounted and can be used to create floating ceilings that absorb sound and enhance sound quality.



linear



Product Specifications

TYPICAL APPLICATIONS

Wall and ceiling coverings

- Composition: 100% Polyester
- Low VOC
- Colourfastness Properties
 - Colourfastness to Light, AATCC16(3), Class 4.5
- BS EN ISO 354:L2003.
- Certified 100% Recyclable
- Composition: 100% polyester fibre (PET) 70% recycled

FIRE RATING

- BS1 D0
- Suitable for use in Class1 and Class 0

SIZE

- 1200 x 2400

ACOUSTIC PROPERTIES

- NRC: .30 A Mount
- EN ISO 11654:1997
- Mounting the panels over battens with a 50mm air gap will increase performance to 0.70 NRC tests have proven.

INSTALLATION


- Linear acoustic panels can be installed by two methods.
- Attach with screws to ceiling.
 - Wall mounted; use a contact adhesive.

Moisture Absorption

Polyester fibre when exposed to an atmosphere of 50°C at 90% relative humidity for four days showed moisture absorption of less than 0.03% by weight. Polyester is not affected by moisture.

Does not contain any Red List chemicals*.

linear

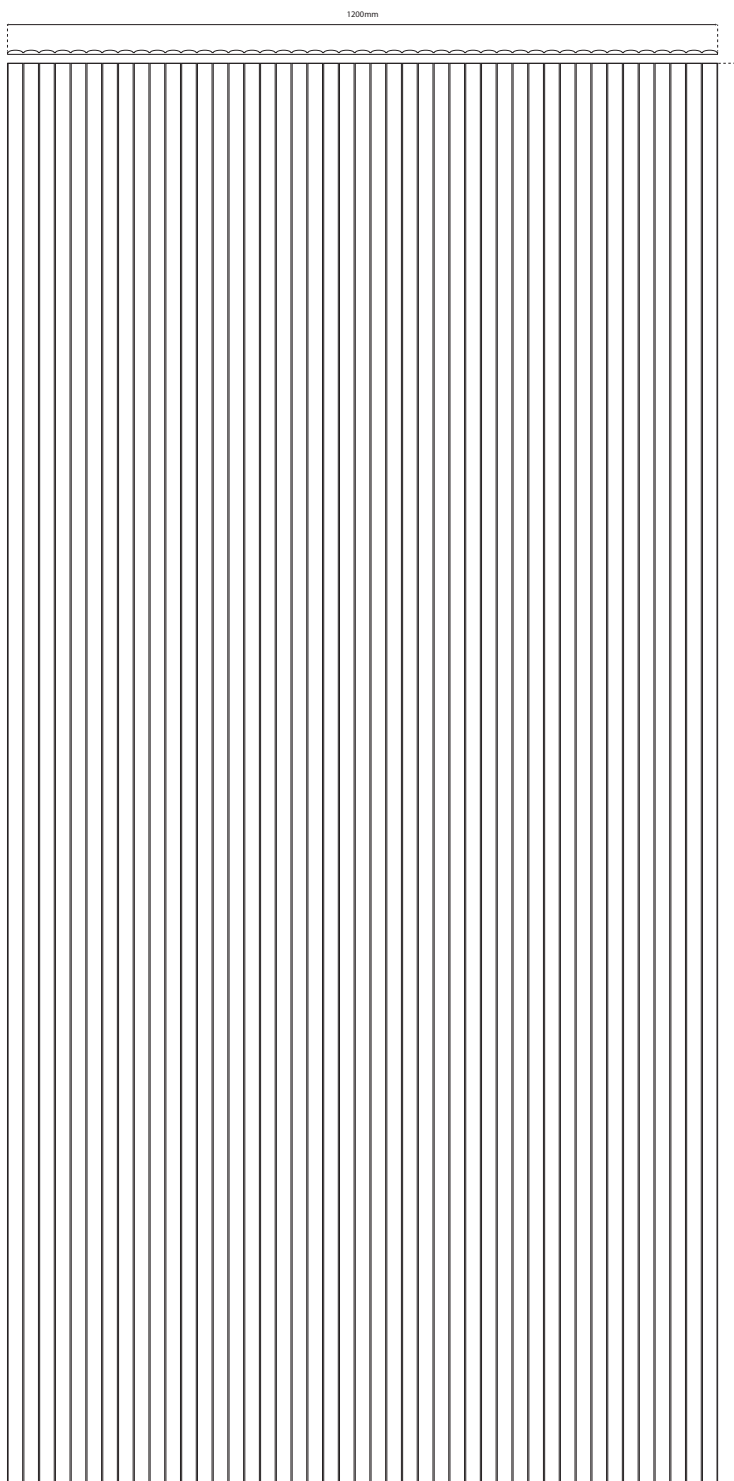

To assist in accurate pattern matching on a continuous wall, Linear has been cut on all four sides with a 5 degree bevel.

